


Tipo	Correia		d	D1	L	A1	L1	e	n	Peso [kg]	Referência do Rolo	Cmax [kg]	n0 [RPM]					
	Pol	mm																
Duplo	16	406	15	50,8	250	258	276	12	9	1,1	BCM RC 16" Ø15 Ø50	94,1	376					
				76,2						1,5	BCM RC16" Ø15 Ø76	72,7	251					
Duplo	20	508	15	50,8	280	288	306	12	9	1,2	BCM RC 20" Ø15 Ø50	83,1	376					
				76,2						1,7	BCM RC 20" Ø15 Ø76	63,5	251					
			20	76,2				14	9	3,0	BCM RC20" Ø20 Ø76	154,6	251					
				101,6						4,3	BCM RC 20" Ø20 Ø101	163,7	188					
Triplo	24	610	15	76,2	230	238	256	12	9	1,4	BCM RC 24" Ø15 Ø76	80,3	251					
				76,2						2,6	BCM RC 24" Ø20 Ø76	199,5	251					
			20	101,6				14	9	3,7	BCM RC 24" Ø20 Ø101	210,1	188					
				127,0						4,5	BCM RC 24" Ø20 Ø127	209,3	150					
Triplo	30	762	15	76,2	280	288	306	12	9	1,7	BCM RC 30" Ø15 Ø76	63,5	251					
				101,6						4,3	BCM RC 30" Ø20 Ø101	163,7	188					
			20	127,0				14	9	5,2	BCM RC 30" Ø20 Ø127	162,7	150					
Triplo	32	813	15	76,2	300	308	326	12	9	1,8	BCM RC 32" Ø15 Ø76	58,6	251					
				101,6						4,5	BCM RC 32" Ø20 Ø101	150,1	188					
			20	127,0				14	9	5,5	BCM RC 32" Ø20 Ø127	149,2	150					
Triplo	36	914	15	76,2	340	348	366	12	9	2,0	BCM RC 36" Ø15 Ø76	50,5	251					
				101,6						5,0	BCM RC 36" Ø20 Ø101	128,6	188					
			20	127,0				14	9	6,0	BCM RC 36" Ø20 Ø127	127,5	150					
Triplo	42	1067	20	101,6	380	388	406	14	9	5,4	BCM RC 42" Ø20 Ø101	112,1	188					
				127,0						6,6	BCM RC 42" Ø20 Ø127	110,9	150					
			25	101,6			18	12	6,2	BCM RC 36" Ø25 Ø101	226,2	188						
				127,0					7,5	BCM RC 36" Ø25 Ø127	224,8	150						
				152,4					9,3	BCM RC 36" Ø25 Ø152	223,0	125						
				165,1					10,0	BCM RC 36" Ø25 Ø165	222,4	116						
			Triplo	48			1219	20	101,6	440	448	466	14	9	6,1	BCM RC 48" Ø20 Ø101	93,4	188
									127,0						7,4	BCM RC 48" Ø20 Ø127	92,1	150
25	101,6	18			12	7,0		BCM RC 48" Ø25 Ø101	188,4			188						
	127,0					8,4		BCM RC 48" Ø25 Ø127	186,9			150						
	152,4					10,5		BCM RC 48" Ø25 Ø152	184,9			125						
	165,1					11,2		BCM RC 48" Ø25 Ø165	184,1			116						
30	127,0	22			12	10,8		BCM RC 48" Ø30 Ø127	272,1			150						
	152,4					13,1		BCM RC 48" Ø30 Ø152	269,9			125						
	165,1					14,0		BCM RC 48" Ø30 Ø165	268,9			116						
Triplo	54	1372	20	101,6	490	498	516	14	9	6,7	BCM RC 54" Ø20 Ø101	81,6	188					
				127,0						8,1	BCM RC 54" Ø20 Ø127	80,2	150					
				152,4						9,6	BCM RC 54" Ø20 Ø152	78,7	125					
			25	101,6			18	12	7,6	BCM RC 54" Ø25 Ø101	164,9	188						
				127,0					9,2	BCM RC 54" Ø25 Ø127	163,2	150						
				152,4					11,4	BCM RC 54" Ø25 Ø152	161,1	125						
				165,1					12,3	BCM RC 54" Ø25 Ø165	160,2	116						
				127,0					11,7	BCM RC 54" Ø30 Ø127	233,0	150						
				152,4					14,1	BCM RC 54" Ø30 Ø152	230,6	125						
			30	165,1			22	12	15,2	BCM RC 54" Ø30 Ø165	229,6	116						

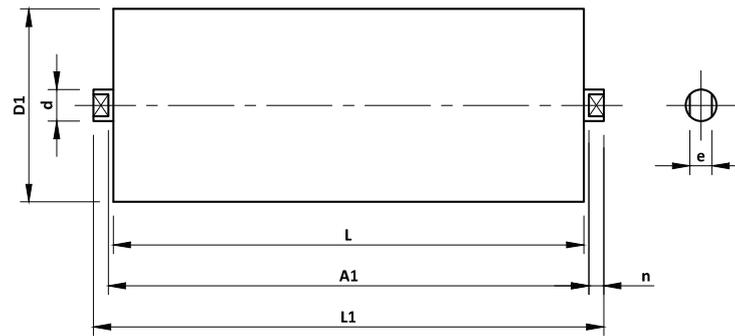

Tipo	Correia		d	D1	L	A1	L1	e	n	Peso [kg]	Referência do Rolo	Cmax [kg]	n0 [RPM]					
	Pol	mm																
Triplo	60	1524	20	101,6	540	548	566	14	9	7,3	BCM RC 60" Ø20 Ø101	72,1	188					
				127,0						8,8	BCM RC 60" Ø20 Ø127	70,6	150					
				152,4						10,4	BCM RC 60" Ø20 Ø152	68,9	125					
			25	101,6				572	18	12	8,3	BCM RC 60" Ø25 Ø101	146,2	188				
				127,0							10,0	BCM RC 60" Ø25 Ø127	144,3	150				
				152,4							12,4	BCM RC 60" Ø25 Ø152	142,0	125				
			30	165,1			572	22	12	13,3	BCM RC 60" Ø25 Ø165	141,1	116					
				127,0						12,5	BCM RC 60" Ø30 Ø127	203,1	150					
				152,4						15,2	BCM RC 60" Ø30 Ø152	200,4	125					
			Triplo	72			1829	20	101,6	640	648	666	14	9	8,4	BCM RC 72" Ø20 Ø101	57,6	188
									127,0						10,2	BCM RC 72" Ø20 Ø127	55,8	150
									152,4						12,1	BCM RC 72" Ø20 Ø152	53,9	125
25	101,6	672			18	12		9,6	BCM RC 72" Ø25 Ø101				118,1	188				
	127,0							11,5	BCM RC 72" Ø25 Ø127				116,1	150				
	152,4							14,3	BCM RC 72" Ø25 Ø152				113,3	125				
30	165,1	672			22	12		15,4	BCM RC 72" Ø25 Ø165			112,3	116					
	127,0							14,2	BCM RC 72" Ø30 Ø127			159,9	150					
	152,4							17,3	BCM RC 72" Ø30 Ø152			156,9	125					
Triplo	80	2032			25	750		758	782			18	12	13,2	BCM RC 80" Ø25 Ø127	94,0	150	
														16,5	BCM RC 80" Ø25 Ø152	90,7	125	
														17,7	BCM RC 80" Ø25 Ø165	89,6	116	
			30	127,0	22		12			16,1	BCM RC 80" Ø30 Ø127	127,6	150					
				152,4						19,6	BCM RC 80" Ø30 Ø152	124,1	125					
				165,1						21,0	BCM RC 80" Ø30 Ø165	122,7	116					
Triplo	84	2134	25	780	788	812	18	12	13,6	BCM RC 84" Ø25 Ø127	89,1	150						
									17,1	BCM RC 84" Ø25 Ø152	85,7	125						
									18,3	BCM RC 84" Ø25 Ø165	84,4	116						
			30				127,0	22	12	16,6	BCM RC 84" Ø30 Ø127	120,6	150					
							152,4			20,2	BCM RC 84" Ø30 Ø152	117,0	125					
							165,1			21,7	BCM RC 84" Ø30 Ø165	115,5	116					