


Tipo	Correia		d	D1	L	A1	L1	e	n	f	Peso [kg]	Referência do Rolo	Cmax [kg]	n0 [RPM]			
	Pol	mm															
Plano	16	406	15	50,8	500	508	534	12	9	4	2,1	BCM RR 16" Ø15 Ø50	43,7000	376			
				76,2							2,8	BCM RR 16" Ø15 Ø76	31,8000	251			
Plano	20	508	15	50,8	560	568	594	12	9	4	2,3	BCM RR 20" Ø15 Ø50	38,4000	376			
				76,2							3,1	BCM RR 20" Ø15 Ø76	27,5000	251			
				76,2							5,2	BCM RR 20" Ø20 Ø76	65,3000	251			
				101,6							7,5	BCM RR 20" Ø20 Ø100	68,8000	188			
				127,0							14	9	4	3,8	BCM RR 24" Ø15 Ø76	20,4000	251
Plano	24	610	20	76,2	700	708	734	14	9	4	6,4	BCM RR 24" Ø20 Ø76	48,9000	251			
				101,6							9,1	BCM RR 24" Ø20 Ø100	50,8000	188			
				127,0							11,0	BCM RR 24" Ø20 Ø127	48,9000	150			
				127,0							4,5	BCM RR 30" Ø15 Ø76	15,5000	251			
Plano	30	762	15	76,2	840	848	874	12	9	4	10,7	BCM RR 30" Ø20 Ø100	38,6000	188			
				101,6							13,0	BCM RR 30" Ø20 Ø127	36,4000	150			
				127,0							12	9	4	4,8	BCM RR 32" Ø15 Ø76	13,8000	251
Plano	32	813	20	76,2	900	908	934	14	9	4	11,4	BCM RR 32" Ø20 Ø100	34,4000	188			
				101,6							13,8	BCM RR 32" Ø20 Ø127	32,1000	150			
				127,0							12	9	4	5,4	BCM RR 36" Ø15 Ø76	11,0000	251
Plano	36	914	15	76,2	1020	1028	1054	12	9	4	12,8	BCM RR 36" Ø20 Ø100	27,4000	188			
				101,6							15,5	BCM RR 36" Ø20 Ø127	24,7000	150			
				127,0							14	9	4	14,2	BCM RR 42" Ø20 Ø100	21,6000	188
				127,0							17,1	BCM RR 42" Ø20 Ø127	18,7000	150			
Plano	42	1067	20	101,6	1140	1148	1174	14	9	4	16,0	BCM RR 42" Ø25 Ø100	52,3000	188			
				127,0							19,2	BCM RR 42" Ø25 Ø127	49,2000	150			
				101,6							24,1	BCM RR 42" Ø25 Ø152	44,3000	125			
			25	127,0			25,8	BCM RR 42" Ø25 Ø165	42,6000	116							
				152,4			16,3	BCM RR 48" Ø20 Ø100	14,5000	188							
				165,1			19,6	BCM RR 48" Ø20 Ø127	11,1000	150							
				165,1			18,4	BCM RR 48" Ø25 Ø100	40,2000	188							
Plano	48	1219	20	101,6	1320	1328	1354	14	9	4	18,4	BCM RR 48" Ø25 Ø127	36,7000	150			
				127,0							21,9	BCM RR 48" Ø25 Ø152	31,0000	125			
				101,6							27,6	BCM RR 48" Ø25 Ø165	29,1000	116			
				127,0							29,5	BCM RR 48" Ø30 Ø127	49,6000	150			
			25	152,4			31,7	BCM RR 48" Ø30 Ø152	43,8000	125							
				165,1			33,8	BCM RR 48" Ø30 Ø165	41,6000	116							
				127,0			694	12	9	4	3,6	BCM RR 48" Ø15 Ø76-2	22,2000	251			
				30			152,4	8,7	BCM RR 42" Ø20 Ø100-2	55,2000	188						
165,1	10,5	BCM RR 48" Ø20 Ø127-2	53,3000		150												
101,6	13,6	BCM RR 48" Ø20 Ø152-2	50,2000		125												
127,0	9,9	BCM RR 48" Ø25 Ø100-2	113,5000		188												
152,4	11,8	BCM RR 48" Ø25 Ø127-2	111,5000		150												
Plano	54	1372	25	101,6	1470	1478	1514	18	12	6	14,8	BCM RR 48" Ø25 Ø152-2	108,6000	125			
				127,0							15,8	BCM RR 48" Ø25 Ø165-2	107,5000	116			
				152,4							20,3	BCM RR 54" Ø25 Ø100	32,0000	188			
			30	165,1			24,2	BCM RR 54" Ø25 Ø127	28,2000	150							
				127,0			30,5	BCM RR 54" Ø25 Ø152	21,9000	125							
				152,4			32,6	BCM RR 54" Ø25 Ø165	19,7000	116							
				165,1			28,4	BCM RR 54" Ø30 Ø127	38,7000	150							
											34,8	BCM RR 54" Ø30 Ø152	32,2000	125			
											37,2	BCM RR 54" Ø30 Ø165	29,9000	116			

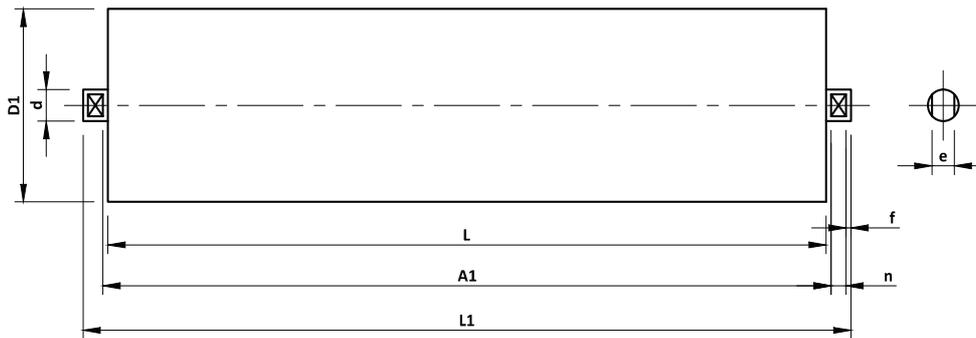

Tipo	Correia		d	D1	L	A1	L1	e	n	f	Peso [kg]	Referência do Rolo	Cmax [kg]	n0 [RPM]						
	Pol	mm																		
Duplo	54	1372	15	76,2	730	738	764	12	9	4	3,9	BCM RR 54" Ø15 Ø76-2	19,2	251						
				101,6			764	14	9	4	9,5	BCM RR 54" Ø20 Ø100-2	47,8	188						
				127,0							11,5	BCM RR 54" Ø20 Ø127-2	45,8	150						
				152,4							14,8	BCM RR 54" Ø20 Ø152-2	42,4	125						
				101,6							774	18	12	6	10,8	BCM RR 54" Ø25 Ø100-2	99,7	188		
				127,0			12,9	BCM RR 54" Ø25 Ø127-2	97,5	150										
			152,4	16,1	BCM RR 54" Ø25 Ø152-2	94,3	125													
			165,1	17,3	BCM RR 54" Ø25 Ø165-2	93,1	116													
			Plano	60	1524	25	101,6	1630	1638	1674	18	12	6	22,4	BCM RR 60" Ø25 Ø100	24,6	188			
							127,0							26,6	BCM RR 60" Ø25 Ø127	20,4	150			
							152,4							33,6	BCM RR 60" Ø25 Ø152	13,4	125			
							165,1							35,9	BCM RR 60" Ø25 Ø165	11,1	116			
127,0	22	12					6							31,1	BCM RR 60" Ø30 Ø127	28,9	150			
152,4														38,2	BCM RR 60" Ø30 Ø152	21,8	125			
165,1	40,8	BCM RR 60" Ø30 Ø165				19,2	116													
Duplo	60	1524				15	76,2	810	818	844	12	9	4	4,3	BCM RR 60" Ø15 Ø76-2	16,4	251			
							101,6			844	14	9	4	10,4	BCM RR 60" Ø20 Ø100-2	40,9	188			
							127,0							12,6	BCM RR 60" Ø20 Ø127-2	38,7	150			
							152,4							16,3	BCM RR 60" Ø20 Ø152-2	35,0	125			
							101,6							854	18	12	6	11,8	BCM RR 60" Ø25 Ø100-2	86,8
			127,0	14,1	BCM RR 60" Ø25 Ø127-2		84,5			150										
			152,4	17,7	BCM RR 60" Ø25 Ø152-2	80,9	125													
			165,1	18,9	BCM RR 60" Ø25 Ø165-2	79,7	116													
			Duplo	72	1829	20	101,6	960	968	994	14	9	4	12,1	BCM RR 72" Ø20 Ø100-2	30,7	188			
							127,0							14,6	BCM RR 72" Ø20 Ø127-2	28,2	150			
							152,4							19,0	BCM RR 72" Ø20 Ø152-2	23,9	125			
							101,6							1004	18	12	6	13,7	BCM RR 72" Ø25 Ø100-2	68,4
127,0	16,4	BCM RR 72" Ø25 Ø127-2					65,7											150		
152,4	20,6	BCM RR 72" Ø25 Ø152-2					61,5											125		
165,1	22,1	BCM RR 72" Ø25 Ø165-2				60,1	116													
Duplo	80	2032				25	127,0	1120	1128	1164	18	12	6	18,9	BCM RR 80" Ø25 Ø127-2	50,8	150			
							152,4							23,7	BCM RR 80" Ø25 Ø152-2	46,0	125			
							165,1							25,4	BCM RR 80" Ø25 Ø165-2	44,3	116			
							127,0							22	12	6	22,4	BCM RR 80" Ø30 Ø127-2	68,1	150
							152,4										27,4	BCM RR 80" Ø30 Ø152-2	63,1	125
			165,1	29,3	BCM RR 80" Ø30 Ø165-2		61,2										116			
			Duplo	84	2134	25	127,0	1170	1178	1214	18	12	6	19,6	BCM RR 84" Ø25 Ø127-2	46,9	150			
							152,4							24,7	BCM RR 84" Ø25 Ø152-2	41,9	125			
							165,1							26,4	BCM RR 84" Ø25 Ø165-2	40,1	116			
							127,0							22	12	6	23,3	BCM RR 84" Ø30 Ø127-2	63,0	150
							152,4										28,5	BCM RR 84" Ø30 Ø152-2	57,7	125
							165,1										30,5	BCM RR 84" Ø30 Ø165-2	55,8	116